

# FULL LINE CATALOG



YOUR PARTNER FOR  
TILE & FLOORING INSTALLATION



Surface Preparation • Flooring Adhesives • Mortars & Additives • Mastics • Grouts & Sealants • Preformed Components



TEC® is a leading brand of high quality, technologically advanced products for the installation and surface preparation of tile, stone, carpet, wood and resilient floor coverings.

For over 60 years, we have scientifically designed products that streamline the installation process so you can work efficiently without sacrificing quality. Creating problem-solving products that perform to the highest standards is at the core of what we do every day.

We know you take pride in your work. That's why we develop solutions that solve your toughest problems. From our top performing surface prep products, to our innovative tile and flooring installation systems, we have solutions that save you time and money, so that you can work smarter.

### **TEC Offers Industry-Leading Installation Warranties**

At TEC, our products are designed and formulated to work together to deliver the best results. We offer full systems of products to support you from prep to finish on the installation of tile, carpet, wood, vinyl and more. For more information on our system warranties, scan the QR code below.



TEC® is a proud partner of:



# Table of Contents

## Surface Preparation

- Introduction - Page 4
- Microbial Removers - Page 5
- Moisture Mitigation - Page 6
- Patches and Patch Additives - Pages 7-9
- Self-Leveling Underlayments - Pages 10-13
- Primers - Page 14
- Crack Isolation and Waterproofing Membranes - Pages 14-15

## Flooring Adhesives

- Introduction - Page 16
- Resilient Adhesives - Pages 17-19
- Multipurpose Adhesives - Page 20
- Carpet Adhesives - Pages 21-22
- Cove Base Adhesive - Page 23
- Turf Adhesive - Page 23
- Wood Flooring Adhesives - Pages 24-25

## Mortars & Additives

- Introduction - Page 26
- Reactive Tile Adhesive - Page 27
- Polymer-Modified Mortars - Pages 27-32
- Polymer-Modified Crack Isolation Mortar - Page 33
- Polymer-Modified Fast Set Mortars - Pages 33-34
- Dry Set Mortars - Pages 35-36
- Specialty Mortars - Page 36
- Mortar Additives - Page 37

## Mastics

- Introduction - Page 38
- Mastics - Pages 38-39

## Grouts & Sealants

- Introduction - Page 40
- Advanced Performance Grouts - Pages 41-44
- Premixed Grouts - Page 45
- Epoxy Grout - Page 46
- Epoxy Grout Cleaner - Page 46
- Traditional and Cement Grouts - Page 47
- Grout Additive - Page 48
- Grout Boost® - Page 48
- Caulks and Sealants - Page 49

## Microbial Cleaners

- Introduction - Page 50
- Microbial Cleaners - Pages 50-52

## Preformed Components

- Introduction - Page 53
- Niches - Page 53
- Slopes - Page 53

## Grout & Caulk Colors

- TEC® Grout & Caulk Color Palette - Page 54

# Surface Preparation



## PREP FOR SUCCESS

TEC® surface preparation products have been engineered to make your job easier. From our fast-drying, one coat moisture mitigation product, to our fast-drying, cement-based underlayment for deep fills, we offer products that save you time and money without compromising quality.

- Microbial Removers
- Moisture Mitigation
- Patches and Patch Additives
- Self-Leveling Underlayments
- Primers
- Crack Isolation and Waterproofing Membranes

# Microbial Removers

## Microbial Acrylic Adhesive Remover (MAAR)

An advanced, ready-to-use, non-hazardous surface preparation solution that effectively removes existing pressure sensitive (PSA) adhesives from flooring substrates. The fast-acting microbial formula breaks down water-based adhesive contaminants that can be washed off with water. Unlike traditional solvent-based adhesive removers that leave harmful residues and inhibit bonding, no concrete shot blasting or grinding is required after MAAR application. MAAR leaves a clean, residue-free subfloor surface ready for flooring installation.

- Ready-to-use water-based formula
- Non-hazardous & no harmful fumes
- Leaves no residues that could inhibit bonding
- No mechanical removal or neutralizing required for faster results at a lower cost
- Fast-acting microbial technology
- Effectively removes water-based resilient, carpet and wood adhesives\*
- Restores floor surface to a pristine, contaminant-free substrate
- User friendly: solvent-free, neutral pH, Zero VOCs



**Available in:**    **Item Number:**

**2 gallon pail**    **10015574**

**4 gallon pail**    **10015545**

\* Do not use for removal of reactive adhesives like urethanes or modified silanes

## Microbial Wax and Cutback Adhesive Remover (MWCR)

Effectively remove wax and cutback adhesive contaminants from flooring substrates with this ready-to-use solution. The fast-acting microbial formula breaks down hydrocarbon-based contaminants that can be washed off with water. Unlike traditional solvent-based adhesive removers that leave harmful residues and inhibit bonding, no concrete shot blasting or grinding is required after MWCR application. MWCR leaves a clean, residue-free subfloor surface ready for flooring installation.

- Ready-to-use water-based formula
- Solvent-free & no harmful fumes
- Leaves no adverse residues that could inhibit bonding
- No mechanical removal or neutralizing required for faster results at a lower cost
- Fast-acting microbial technology
- Effectively removes hydrocarbon-based waxes and cutback adhesives
- Restores floor surface to a pristine, contaminant-free substrate



**Available in:**    **Item Number:**

**2 gallon pail**    **10015573**

**4 gallon pail**    **10015557**

# Surface Preparation

## Moisture Mitigation

### LiquiDam EZ™ Moisture Vapor Barrier

214

A 1-part waterbased moisture vapor barrier that offers epoxy-level ASTM F3010 performance (<0.1 Perm Rating) with the convenience and safety of a ready-to-use non-hazardous formula. LiquiDam EZ has no minimum CSP and often does not require concrete shotblasting. It effectively reduces moisture over damp or new concrete with a moisture vapor emission rate (MVER) less than or equal to 25 lbs. per 1,000 ft<sup>2</sup> per 24 hours or a maximum relative humidity of 100%. It is designed to reduce the MVER from 25 lbs. to 3 lbs. per 1,000 ft<sup>2</sup> per 24 hours. Two coats are required to fully seal the substrate, and it quickly dries in as soon as 4-5 hours. Once dry, this product doesn't require a primer before the application of TEC® surface preparation products.

- High performance vapor barrier with less than 0.10 Perm Rating (ASTM E96)
- Same day flooring installation—both coats dry within 3-4 hours
- Can be applied to green concrete up to 100% RH
- No primer required before the application of surface preparation products
- No waste and no special handling required
- Shotblasting may not be required. No minimum CSP
- Low VOC



**Available in:**    **Item Number:**

**5 gallon pail**    **15035949**

### LiquiDam™ Penetrating Moisture Vapor Barrier

213

A proven moisture mitigation solution that is ideal for damp or new concrete as little as 48 hours old. LiquiDam™ is a low viscosity, high penetrating, two-part 100% solids epoxy. It has a moisture vapor emission rate (MVER) less than or equal to 25 lbs. per 1,000 ft<sup>2</sup> per 24 hours (0.12 kg/m<sup>2</sup> per 24 hours) or a maximum relative humidity RH of 100%. It is designed to reduce the MVER to less than 3 lbs. per 1,000 ft<sup>2</sup> per 24 hours (0.015 kg/m<sup>2</sup> per 24 hours).

- Only one coat needed
- Same day flooring installation—cures within 4-5 hours
- Direct application onto green concrete up to 100% RH
- Meets ASTM F3010 product requirements for moisture mitigation systems under resilient floor coverings
- Less than 0.10 Perm Rating (ASTM E96)
- Pot life of 25 minutes
- Coverage rate of 180 ft<sup>2</sup> per blended gallon (3.7 m<sup>2</sup>/L)
- Low VOC



**Available in:**    **Item Number:**

**1 gallon kit**    **10016188**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

# Patches and Patch Additives

## Feather Edge Skim Coat

**330**

A high-quality, cement-based compound designed to skim coat, smooth and level irregularities from featheredge up to 1/2" (12 mm). Excellent for use over most substrates and provides a suitable surface for even the most demanding floor coverings, such as VCT, sheet vinyl, etc. It is ideal for use as an embossing leveler when mixed with TEC® Patch Additive (embossing applications require TEC Patch Additive. No patch additive is required if surface has been primed with TEC Multipurpose Primer).

- Fast-setting—install flooring in as soon as 15-20 minutes
- For most applications, use of a primer is not required
- Sandable
- Zero VOC

**Available in:**            **Item Number:**

**10 lb. plastic bag**    **15018407**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## PerfectFinish™

**320**

PerfectFinish™ Skim Coat is an exceptional-performing, high-quality, cement-based compound designed to skim coat, smooth and level irregularities from featheredge up to 1/2 inches (12 mm). It rapidly sets to install most floor coverings in as little as 30 minutes. PerfectFinish has superior bond strength. For most applications, the use of a primer is not required. It is excellent for use over most substrates and provides a suitable surface for even the most demanding floor coverings, such as VCT, sheet vinyl and more. It is an ideal product for use as an embossing leveler when used with TEC® Multipurpose Primer.

- Ultra-fast setting- install flooring in 15-60 minutes
- Exceptional trowelability
- Can be used as an embossing leveler
- Contributes to LEED project points

**Available in:**            **Item Number:**

**10 lb. plastic bag**    **15035122**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Surface Preparation

# Surface Preparation

## Floor Patch Pro

**059**

A fast setting, easy-to-mix, calcium-aluminate cement-based patch and skim coating compound for use under ceramic tile, hardwood flooring, resilient flooring, VCT and carpet, from a featheredge to 2" (5 cm) in thickness. It can be applied to concrete with an RH up to 99%.

- Initial set in 15 minutes
- Accepts tile and stone as well as moisture sensitive floor coverings in as little as 30 minutes (or when completely dried)
- Can be used as an embossing leveler
- Zero VOC

**Available in: Item Number:**

**25 lb. bag 15036028**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Fast-Set Deep Patch

**305**

A cement-based underlayment that is designed specifically for deep fills, ramping, and leveling concrete and plywood subfloors (dry areas only) from featheredge up to 1 1/2" (38 mm) in a single application, up to 5" (12 cm) with proper aggregate. It can be applied with a steel trowel, float and/or screed to produce a smooth, level surface.

- Walkable hardness in 60 minutes, apply most floor coverings in 1 1/2 hours
- 4,200 psi compressive strength
- Zero VOC

**Available in: Item Number:**

**25 lb. bag 15035754**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.



## VersaPatch® Latex Modified Floor Patch

**327**

A fast-setting, cement-based product designed for patching voids and irregularities in wood, concrete and most existing floor materials. The resulting finish is ideal for the installation of sheetgoods, resilient tile, carpet, wood and ceramic or stone tile.

- Patch 1/2" down to a featheredge
- Fast-setting—install flooring in 30–45 minutes
- 4,200 psi compressive strength
- Zero VOC

**Available in:**            **Item Number:**

**9.75 lb. Pure Pak\***    **15036005**

**25 lb. plastic bag**    **15036002**

\* Registered trademark of Excello Corporation



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Patch Additive

**861**

This additive is designed to improve the adhesion, bond strengths and flexural strengths of TEC® brand dry powder surface preparation products. Use as an admixture for TEC VersaPatch®, Fast-Set Deep Patch and PerfectFinish™.

- Freeze/thaw stable
- Highly water resistant when cured
- Low VOC

**Available in:**            **Item Number:**

**1 gallon jug**            **15035253**



## Ready To Use Skimcoat & Patch

**896**

Ready to Use Skimcoat & Patch is a water-based product that is intended to repair minor imperfections to the substrate prior to the installation of the floor covering. It can be used to fill small voids (up to 1/4" (6 mm) deep per application) such as knot holes, nail marks on the floor, nonmoving cracks, seams and joints. This product is designed to have floor covering installed on top of it and is not for use as a final wear layer. It is designed for porous substrates only.

- For use with all floor coverings
- Patch up to 1/4" (6 mm) in a single application
- For use as a skimcoat and embossing leveler
- Dries to a smooth surface
- Fast drying

**Available in:**            **Item Number:**

**1 quart pail**            **15035996**

**1 gallon pail**            **15035995**



**Surface Preparation**

# Surface Preparation

## Self-Leveling Underlayments

### Level Set® 500 HF Self-Leveling Underlayment 500

Ideal for fast track applications, Level Set 500 HF is a high-flow, calcium aluminate-based, self-leveling underlayment that provides an extremely smooth surface for finished floor coverings.

- Exceptional flow and healing properties that yield a super smooth surface
- Up to 60 minutes of working time
- Once cured, no need for additional sanding or skim coating
- Formulated for fast-track applications — walkable in 2-3 hours
- For installations ranging from 1/16" – 2". Featheredge to adjoining elevations
- Up to 20% more coverage from adhesives\*

Available in:	Item Number:
50 lb. bag	15036155 Paper
50 lb. bag	15030009 Plastic

\* Results may vary depending on adhesive and substrate



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

### Level Set® 400 HF Self-Leveling Underlayment

High-flow Level Set 400 HF is a calcium aluminate-based, self-leveling underlayment that provides an extremely smooth surface for finished floor coverings.

- Exceptional flow and healing properties that yield a super smooth surface
- Up to 60 minutes of working time
- Once cured, no need for additional sanding or skim coating
- Formulated for fast-track applications — walkable in 2-3 hours
- For installations ranging from 1/16" – 1 1/2". Featheredge to adjoining elevations

Available in:	Item Number:
50 lb. bag	15036414 Paper
50 lb. bag	15030440 Plastic



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Level Set® 300 Self-Leveling Underlayment

### 300

This calcium aluminate-based self-leveling underlayment provides a flat, extremely smooth and durable surface for finished flooring installation. It can accept tile and stone applications in as little as 4 hours, is pourable and pumpable and can be applied up to 2" (50 mm) neat in single applications and can be featheredged to adjoining elevations.

- Walkable in 2-3 hours
- Install moisture sensitive floor coverings in 16-24 hours
- Can be applied up to 5" (12 cm) with proper aggregate
- High compressive strength—5,500 psi (38.0 MPa)
- Zero VOC
- Contributes to LEED® project points

Available in:	Item Number:
50 lb. bag	15036050 Paper
50 lb. bag	15030023 Plastic



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Level Set® 200 Self-Leveling Underlayment

### 200

This calcium aluminate-based, self-leveling underlayment is ideal for use to level and smooth floors, before finished floor covering installations. It can accept tile and stone applications in as little as 4 hours. It delivers extended 25-35 minute working time without compromising flooring installation time.

- Walkable in 3-4 hours
- Install moisture sensitive floor covering in 16-24 hours
- High compressive strength—5,000 psi (34.5 MPa)
- Zero VOC
- Contributes to LEED® project points

Available in:	Item Number:
50 lb. bag	15036029 Paper
50 lb. bag	15030022 Plastic



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Fiber-Reinforced Underlayment

### 565

A pumpable/pourable, cement-based product that can be used as a self-leveling underlayment over a variety of substrates. The resulting smooth finished surface is ideal for the installation of all types of floor covering, including carpet, ceramic or natural stone tile, resilient, laminate flooring and wood flooring.

- Walkable in 2-4 hours—install flooring in 6 hours
- From 1/16" to 1 1/2" depth in a single pour
- Can be used over green concrete (RH 99% or lower)
- High compressive strength
- 6,000 psi (41.0 MPa)
- Triple-fiber reinforced, extremely low shrinkage
- Zero VOC

Available in:	Item Number:
50 lb. bag	15035752



## Surface Preparation

# Surface Preparation

## Level Set® LW-60 Ultra-Lightweight Self-Leveling Underlayment 053

This is the ideal choice for an underlayment when the weight of materials is a critical factor in load bearing structures. It is a unique, ultra-lightweight, self-leveling underlayment that provides a flat, smooth, durable surface for finished flooring installation, at half of the weight of a conventional portland cement or gypsum-based underlayment—just 60 pounds/cubic foot.

- Walkable in 3-4 hours
- Applications from 1/4" to 2" neat; can be featheredged to adjoining elevations
- Accepts non-moisture sensitive tile and stone in 4 hours
- Install moisture sensitive floor covering in 16-24 hours
- Pumpable or pourable for thick-build applications
- Zero VOC

**Available in:**    **Item Number:**  
**25 lb. bag**        **15036052**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Level Set® Deep Pour 3 Self-Leveling Underlayment 003

This product is ideal for thick-build applications. It is a calcium aluminate, cement-based, self-leveling underlayment that provides a flat, smooth, durable surface up to 3" (76 mm) in one lift.

- Walkable in 3-4 hours
- Up to 3 inches deep in one pour
- Accepts non-moisture sensitive tile and stone in 4 hours
- Install moisture sensitive floor covering in 36-48 hours
- Pumpable or pourable for thick-build applications
- Zero VOC
- Contributes to LEED® project points

**Available in:**    **Item Number:**  
**50 lb. bag**        **15036062**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## EZ Level® Premium Self Leveling Underlayment 323

This cement-based, pourable, pumpable and free flowing underlayment is designed for smoothing and leveling most subfloors and is particularly well-suited for large areas. The resulting smooth finish is ideal for the installation of all types of floor covering, including ceramic or natural stone tile, carpet, resilient, laminate flooring and wood flooring. For interior dry area use only.

- Single Application
- Fast setting - walkable in 2-4 hours, with flooring installation in 12 to 16 hours
- High compressive strength - 5,000 psi (34.2 MPa)
- Can be used over green concrete (RH 99% or lower)
- Contributes to LEED® project points

**Available in:**    **Item Number:**  
**50 lb. bag**        **15035125**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Contractor Grade Self-Leveling Underlayment 567

This pumpable/pourable cement based self-leveling underlayment is designed for use over a variety of substrates. The resulting smooth finished surface is ideal for the installation of all types of floor covering, including carpet, ceramic or natural stone tile, resilient, laminate flooring and wood flooring (for interior dry area use only).

- Walkable in 4-6 hours
- Install ceramic tile in 24 hours and finished floor coverings in 48 hours
- Use directly over green concrete (RH 95% or Lower)
- Thickness ranges from 1/16" up to 1" depth in a single pour, up to 5" (12 cm) with proper aggregate
- Zero VOC
- Contributes to LEED® project points

**Available in:**    **Item Number:**  
**50 lb. bag**        **15035763**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Surface Preparation

# Surface Preparation

## Primers

### Multipurpose Primer

**560**

This ultra-versatile, concentrated acrylic latex primer enhances the performance and adhesion of TEC self-leveling underlayments to porous and non-porous substrates. It may also be used to enable the bonding of other TEC surface preparation products and latex modified thin set mortars to difficult substrates such as metal, glazed ceramic tile, gypsum-based underlayments, concrete treated with certain types of curing compounds (silicate or acrylic resin curing compounds only) and well bonded epoxy coatings. Use to prime resin and metal backings on natural stone and install with latex modified thin set instead of epoxy mortar. For peel and stick tile installation, this primer can be used on dry, porous concrete, gypsum cement underlayments and plywood. It may also be used to promote bond over cold-rolled steel substrates.

- One primer for all approved porous and non-porous substrates
- Easy to apply with brush or roller for non-porous surfaces or push broom for porous surfaces
- Low odor and low VOC

**Available in:    Item Number:**

<b>1 quart jug</b>	<b>15035739</b>
<b>1 gallon jug</b>	<b>15035737</b>
<b>5 gallon pail</b>	<b>15035735</b>



## Crack Isolation and Waterproofing Membranes

### HydraFlex™ Waterproofing Crack Isolation Membrane

**316**

A fast drying, high-performance, ultra-flexible waterproofing and crack isolation membrane for interior and exterior applications. Forms a smooth, monolithic, watertight surface over walls, floors and ceilings. HydraFlex stops in-plane cracks up to 1/8" or up to 1/4" wide (based on application) at the subfloor from telegraphing through to ceramic and stone tile. For residential to extra heavy commercial applications.

- Isolates cracks up to 1/8" or up to 1/4" based on application
- Fast drying—install tile in 1-3 hours and flood test as soon as 2 hours
- High coverage rate: 100 ft<sup>2</sup>/gallon for 1/8" crack protection
- Approved over control joints
- Apply over new (green) concrete as little as 3 days old
- No mesh required - optional for waterproofing
- Exceeds ANSI A118.10 specifications for waterproof membranes
- Exceeds ANSI A118.12 specifications for crack isolation membranes

**Available in:    Item Number:**

<b>1 gallon pail</b>	<b>15035484</b>
<b>3.5 gallon pail</b>	<b>15035482</b>
<b>5 gallon pail</b>	<b>15035483</b>



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Triple Flex™ Waterproofing Crack Isolation Membrane

**324**

Elastomeric cementitious system for waterproofing and crack isolation up to 1/8" wide prior to the installation of ceramic tile or stone. Will not transfer cracks through tile or stone when subjected to horizontal movement of cracks up to 1/8". For interior and exterior use.

- Multipurpose—three uses for one product
- Can also be used as a flexible bonding mortar to set tile up to 12" x 12"
- For larger tile or light colored marble, use Triple Flex as a crack isolation membrane first
- IAPMO approved
- Meets ANSI A118.10 specifications for waterproof membranes
- Exceeds ANSI A118.12 specifications for crack isolation membranes
- Zero VOC

<b>Available in:</b>	<b>Item Number:</b>
<b>5 gallon kit</b>	<b>15035252</b>
<b>2 gallon pail (Pt. A)</b>	<b>15035251</b>
<b>22.5 lb bag (Pt. B)</b>	<b>15035304</b>
<b>6" x 50' roll mesh (Pt. C)</b>	<b>15036321</b>



## Waterproofing Mesh

- For waterproofing installations at changes in-plane and substrate joints
- Use with HydraFlex® Waterproofing Crack Isolation Membrane or Triple Flex™ Waterproofing Crack Isolation Membrane

<b>Available in:</b>	<b>Item Number:</b>
<b>6" x 50' roll</b>	<b>75000351</b>



## Joint/Crack Filler

This is a moisture-tolerant, 2-component sealant, designed to fill cracks and saw cuts in concrete slabs, prior to patching underlayments and/or moisture mitigation solutions. Joint/Crack Filler was designed for fast curing and easy cutting in less than 60 minutes and avoid the need to sand the joint. It is designed to work between 14°F (-10°C) and 95°F (35°C) with only minimal impact on cure rate.

- Fast setting, can apply moisture mitigation, floor prep or flooring in 1 hour
- Ideal to fill control joints / saw cuts / in-plane cracks
- High bond strength, fill cracks up to 2" (5 cm)
- Can be trimmed with a razor to avoid sanding
- Low viscosity two-part system mixes within the nozzle tip

<b>Available in:</b>	<b>Item Number:</b>
<b>8.6 fl oz. cartridge</b>	<b>15030232</b>



**Surface Preparation**

# Flooring Adhesives



## INNOVATIVE SOLUTIONS TO HELP YOU WORK SMARTER

TEC® flooring adhesives provide you with the options you need for your most demanding flooring installations. From vinyl to carpet, wood to wall base, TEC flooring adhesives offer lasting performance and dependable solutions.

- Resilient Adhesives
- Multipurpose Adhesives
- Carpet Adhesives
- Cove Base Adhesives
- Wood Flooring Adhesives

### ***TEC High Moisture Technology (HMT)***

Adhesives with this designation withstand up to 99% RH or 12 lbs. moisture vapor emission rate (MVER) in a single application. This advanced technology saves time and money by taking the labor out of the moisture mitigation process, over newly poured concrete with declining values.





# Resilient Adhesives

## Flexera® 2K PSA Hybrid Adhesive

Flexera 2K PSA Hybrid Adhesive is an ultra-high-performance, two-part, waterbased adhesive designed for installation of homogeneous and heterogeneous sheet flooring, sports flooring, LVT, rubber, and linoleum in demanding interior environments. This user-friendly adhesive combines easy PSA-method flooring installation with the proven durability and robust adhesion of epoxy adhesives.

- PSA-method flooring installation
- Aggressive initial tack holds down seams
- Open time up to 4 hours, pot life up to 10+ hours
- Up to 100% RH and 25 lbs MVER
- Maximum pH limit of 14
- Recommended for flashcoving
- Low odor and low VOC waterbased formula
- Green Label Plus Certified

**Available in:**      **Item Number:**  
**2.5 gallon pail**    **10013203**



## Flexera® High Tack Premium Universal Adhesive

Flexera HT (High Tack) Premium Universal Adhesive is an ultra-aggressive PSA formulated for installation of dimensionally stable LVT/LVP (including foam-backed), VCT, quartz tile, bio-based tile, vinyl-backed sheet flooring and fiberglass-backed sheet flooring. It combines long open time with fast strength build that allows immediate foot traffic after dry-set installation.

- Ultra-aggressive PSA - High tack and robust adhesion
- High moisture tolerance - Up to 99% RH and 12 lbs MVER
- Long open time - Up to 12 hours
- Fast strength build - Immediate foot traffic after dry-set installation
- Low VOC
- LEED compliant

**Available in:**      **Item Number:**  
**1 quart pail**      **15036437**  
**1 gallon pail**     **10008895**  
**4 gallon pail**     **10008611**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.



## Flooring Adhesives

# Flooring Adhesives

## Flexera® Premium Universal Adhesive

774

This solvent-free, pressure-sensitive adhesive is formulated for the installation of dimensionally stable luxury vinyl tile, vinyl plank, PVC, carpet tile, VCT, quartz tile, bio-based tile, fiberglass-backed sheet flooring and vinyl backed resilient sheet flooring. Designed for installation over porous and non-porous substrates, this high-strength adhesive can handle foot traffic in as little as four hours.

- Aggressive tack and robust adhesion with very high shear and peel strength
- High moisture tolerance - Up to 99% RH and 12 lbs MVER
- Long open time - up to 12 hours
- Ultra-fast strength build - Immediate foot traffic after dry-set installation
- Can install wet-set or dry-set
- Low VOC
- Repositionable installation for dry-set

**Available in:**      **Item Number:**

**1 gallon pail**      **15018427**

**4 gallon pail**      **15016891**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Flexera® Vinyl Flooring Spray Adhesive

Flexera Vinyl Flooring Spray Adhesive is designed to be used for multiple types of resilient flooring. This unique formula is highly water resistant, non-flammable, and VOC compliant. It also provides a tenacious long lasting bond with the ease of removal for the next renovation.

- Premium pressure sensitive
- Allows immediate foot traffic
- Extended coverage - 150 sq. ft. per can
- High moisture and pH resistance

**Available in:**      **Item Number:**

**22 oz. spray can**      **15036416**



## Vinyl Composition Tile Adhesive

713

This low-odor adhesive is used for the installation of all brands of VCT. It dries clear and quickly to give you a clean, finished look in less time.

- Water resistant
- Dries clear
- Excellent grab
- Freeze/Thaw stable
- Low odor

<b>Available in:</b>	<b>Item Number:</b>
----------------------	---------------------

1 quart pail	15035593
--------------	----------

1 gallon pail	15035590
---------------	----------

3.5 gallon pail	15035588
-----------------	----------



## Stair Tread Adhesive

470

This solvent-free, plasticizer resistant, latex rich adhesive formulated to provide an exceptional bond when installing rubber or vinyl stair tread, radial tile or rubber sheet flooring over porous and non-porous surfaces free of moisture.

- Extended open time
- Good for rubber or vinyl stair tread, rubber tile or sheet flooring
- Good for PVC-backed carpet & tiles, solid vinyl sheet, linoleum and LVP & LVT
- Non hazardous
- Non flammable

<b>Available in:</b>	<b>Item Number:</b>
----------------------	---------------------

1 gallon pail	10007847
---------------	----------

4 gallon pail	15030184
---------------	----------



## Nose Caulk Filler

Nose Caulk Filler is a 2-part, solvent-free, high-performance epoxy caulking adhesive, used for indoor installations of rubber and vinyl stair treads. This epoxy caulking adhesive provides support to the “nose” area, particularly on stairs that have irregular wear or oddly shaped leading edges.

- Commercial grade
- High strength: >10,000 psi
- 100% Solids, non-shrink
- Secures railings or posts
- Resists chemicals/solvents

<b>Available in:</b>	<b>Item Number:</b>
----------------------	---------------------

8.6 fl oz. cartridge	15030233 (6 per case)
----------------------	-----------------------



## Flooring Adhesives

# Flooring Adhesives

## Multipurpose Adhesives

### The Perfect Putdown®

717

This adhesive is designed for the installation of most carpet and mineral felt backed, fiber backed and paper backed resilient sheetgoods. It is recommended for use with most common carpet backings, and also provides the strong initial tack required for hard-to-bond backings. Use for installations over freshly poured concrete with a vapor barrier in place.

- 20 to 40 minutes working time
- Withstands 86% RH or up to 8 lbs. MVER in new concrete
- Low odor
- Zero VOC

**Available in:**    **Item Number:**

<b>3.5 gallon pail</b>	<b>15036407</b>
<b>1 gallon pail</b>	<b>15036406</b>
<b>1 quart pail</b>	<b>15036405</b>



Conforms with LEED® v4 low emitting interiors. Compliant with (CDPH) Standard Method v1.2 VOC Emissions.

### Contract Multipurpose Adhesive

700

A multipurpose adhesive that provides value and performance for many types of installations including sheetgoods and carpet to approved substrates. Not for use with fiberglass backed sheetgoods.

- Non-flammable
- Solvent free
- Freeze/thaw stable to 10°F (-12°C) for a minimum of 5 cycles
- Zero VOC

**Available in:**    **Item Number:**

<b>4 gallon pail</b>	<b>15035005</b>
----------------------	-----------------



Conforms with LEED® v4 low emitting interiors. Compliant with (CDPH) Standard Method v1.2 VOC Emissions.

# Carpet Adhesives

## Indoor/Outdoor Carpet Adhesive

975

This waterproof adhesive is used to install marine or action-backed outdoor carpets. Use it over concrete or wood substrates. It is approved for pressure-treated wood.

- Exceptional bond
- Solvent free
- Up to 8 lbs. MVER / 85% RH

**Available in:**    **Item Number:**

**1 quart pail**      **15035586**

**1 gallon pail**    **15035584**

**3.5 gallon pail** **15035581**



## Premium Fast Grab Carpet Adhesive

704

This premium adhesive is used to install carpet or fiber-backed sheet goods to all approved substrates. It withstands 86% RH or up to 8 lbs. MVER in new concrete. This product is highly water-resistant when cured.

- Great for high traffic areas
- Solvent free
- Zero VOC

**Available in:**    **Item Number:**

**4 gallon pail**    **15035178**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Double-Stick Carpet Adhesive

902

This adhesive is specially formulated with an extended open time for the installation of pattern matched goods. It withstands 90% RH or up to 8 lbs. MVER in new concrete. This adhesive's characteristics make it equally suited for installing carpet using the Double Bond or Direct Glue method of installation.

- Extended open time for installation of pattern matched goods
- Solvent free
- Low odor

**Available in:**    **Item Number:**

**4 gallon pail**    **15018411**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

# Flooring Adhesives

# Flooring Adhesives

## Releasable Pressure Sensitive Adhesive

749

This adhesive is designed for modular carpet tiles and Double Bond carpet cushions. It has a durable tack for an aggressive bond, yet is releasable to allow for ease of replacement. It is extremely low odor, so it is ideal for occupied buildings.

- Freeze/thaw stable to 10°F (-12°C) for a minimum of 5 cycles
- Withstands 90% RH or up to 10 lbs. MVER in new concrete
- Low odor
- Zero VOC

Available in:	Item Number:
1 quart pail	15036376
1 gallon pail	15036375
1 gallon pail (French)	15035541
3.5 gallon pail	15036377
4 gallon pail	15035538



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Carpet Pad Adhesive

10

A solvent-free, synthetic, latex-based adhesive formulated to adhere carpet cushion to porous and non-porous substrates. Secures cushion in place quickly to facilitate fast carpet installations. Prevents wrinkling and shifting during the stretch-in method of installation.

- Fast curing
- Zero VOC

Available in:	Item Number:
1 gallon bottle	15035572



## Universal Solvent-Free Seam Sealer

131

A latex-based, non-flammable, carpet seam sealer specially formulated to prevent edge raveling and to seal the seams of most commercial and outdoor carpets including vinyl backs in direct glue down, stretch in, and double glue down installations. It is compatible with most carpet backings ActionBac®, jute, latex unitary, wovens, rubber backed, urethane (attached cushion). It is fast setting and moisture proof. Adhesive is freeze/thaw stable to 10°F (-12°C) Not for use with vinyl sheet goods.

- Solvent-free
- Fast curing
- Moisture proof

Available in:	Item Number:
8 fl. oz. bottle	15036264



\* ActionBac® is a registered trademark of Propex Inc.

# Cove Base Adhesive

## Premium Wall and Cove Base Adhesive

### 714 / 714 W

A solvent-free cove base adhesive developed for use with rubber, vinyl or Thermoplastic Rubber (TPR) wall base.

- Outstanding wet suction for wrapping corners
- Freeze/thaw stable to 10°F (-12°C) for a minimum of 5 cycles
- Excellent water resistance and non-staining properties
- Low odor
- Low VOC

<u>Available in:</u>	<u>Item Number:</u>
29 oz. cartridge	15035009 Tan
29 oz. cartridge	15035569 White
2 gallon pail	15035008 Tan
4 gallon pail	10013706 White
11 oz. cartridge	15035601 Tan
1 quart pail	15035598 Tan



Conforms with LEED® v4 low emitting interiors. Compliant with (CDPH) Standard Method v1.2 VOC Emissions.

# Turf Adhesive

## 2-C Turf Adhesive

### 149

A two-component, quick grab, urethane adhesive designed to provide superior bonds for synthetic turf field covering at the seams, line markings, and logos. TEC® 149 is applicable for interior and exterior athletic and landscape applications. TEC 149 provides seam strengths that are in compliance with FIFA standards.

- Green color blends in with most synthetic turf products
- Cures in 12 hours
- Solvent free

<u>Available in:</u>	<u>Item Number:</u>
2.58 gallon pail	15019001



## Synthetic Turf Tape

Seaming tape for the artificial turf installation.

### Type F

<u>Available in:</u>	<u>Item Number:</u>
100 m roll	15020145

### Type C

<u>Available in:</u>	<u>Item Number:</u>
100 m roll	10014319



# Flooring Adhesives

# Flooring Adhesives

## Wood Flooring Adhesives

### Wood Secure™ Premium Wood Adhesive

A game-changing, ultra-high performance wood flooring adhesive specifically designed to provide unmatched moisture vapor control combined with super-easy cleanup and simple, non-destructive hollow spot repair. This versatile “everyday” adhesive is suitable for solid, engineered and parquet wood flooring as well as crumb rubber underlays.

- Ultra-low moisture vapor permeability for unlimited subfloor moisture control
- No moisture testing required when installed using the Moisture Control Method
- Most “hollow areas” can be corrected, WITHOUT expensive and time-consuming drilling and injecting process

**Available in:**    **Item Number:**  
**4 gallon pail**    **10014526**



### Wood Assure™ Premium Urethane Wood Flooring Adhesive and Moisture Barrier 804

This product offers top-of-the line urethane adhesive performance with sound control properties and no pre-installation moisture testing required\*. Easy to trowel and clean up, it saves installation time and eliminates the need for multiple product applications.

- Moisture vapor protection
- Zero VOC
- Outstanding green strength

**Available in:**    **Item Number:**  
**3.5 gallon pail**    **15036357**



### Wood Endure™ Advanced Performance Wood Flooring Adhesive 806

This adhesive has a modified silyl technology that delivers superior bond strength, sound control properties and moisture protection – no pre-installation moisture testing is required\*.

- No moisture testing required
- Zero Isocyanates
- Extremely easy to trowel
- Zero VOC

**Available in:**    **Item Number:**  
**1 gallon pail**    **15036210**  
**3.5 gallon pail**    **15018415**



\* No moisture testing or mitigation needed when there is no visible moisture present.



## Wood Go™ Urethane Wood Flooring Adhesive 802

This is your everyday, go-to, urethane adhesive for wood flooring. Wood Go provides subfloor moisture control up to 95% RH and 15 lbs MVER when the Moisture Control installation method is used. It has superior ridge retention to keep the wood aligned during installation, so that no hollow spots exist in the finished floor.

- Moisture control up to 95% RH and 15 lbs. (6.80 kg) MVER
- Extremely easy to trowel
- Excellent trowel ridge retention
- Low VOC

**Available in:**      **Item Number:**

**4 gallon pail**      **10016941**

**5 gallon pail**      **15036358**



## Wood Ready™ Engineered Wood Flooring Adhesive 800

This adhesive is formulated especially for the challenges of engineered wood\* flooring. Wood Ready works well for installing all wood flooring widths and thicknesses.

- Extended open time
- Extremely easy to trowel
- Low VOC

**Available in:**      **Item Number:**

**4 gallon pail**      **15016743**

\* Domestic species e.g. oak, maple, hickory, ash etc.



## Wood & Tackstrip Adhesive 216

This fast-curing urethane constructive adhesive has high bond strength. It is used for bonding tackstrip to concrete subfloors and for bonding plywood to joints.

- Fast curing- install within 15-20 minutes
- High bond strength

**Available in:**      **Item Number:**

**9.5 oz. cartridge**      **15036314**



# Mortars & Additives



## MORTARS FOR EVERY NEED

No matter what your tile challenge is—small mosaics, large or extra large, thick and heavy or gauged porcelain panels, walls or floors, glass or porcelain—TEC® gives you the options to ensure a secure bond in any installation.

- Reactive Tile Adhesive
- Polymer-Modified Mortars
- Polymer-Modified Crack Isolation Mortar
- Polymer-Modified Fast Set Mortars
- Dry Set Mortars
- Specialty Mortars
- Mortar Additives

# Reactive Tile Adhesive

## TotalFlex® XMS Tile Adhesive

Only TotalFlex XMS Tile Adhesive is designed for the most challenging wall applications on earth. From exterior building facades to submerged use in pools and clear glass installations, it offers unmatched versatility paired with a time-saving, one-sided application. So work smarter instead of harder with a tile adhesive that sticks where no others can.

- Ready to use — No mixing, no waste
- Extremely durable — For exterior and submerged use
- 1-Side adhesive application — Cut install time by up to 50%
- Long open time with instant grab
- Unmatched versatility: exterior facades; pools, spas, water features; wall tile; shower floors (mosaics); countertops



Available in:	Item Number:
4 gallon pail	10013156
2 gallon pail	10015390

# Polymer-Modified Mortars

## TotalFlex® 150 & 110

High-performance, polymer-modified mortars that provide ultra-long open time and extra smooth and creamy troweling. They are ideal for large and heavy tile, standard and mosaic tile, gauged porcelain panels and uncoupling membrane applications.

- Universal — Ideal for gauged porcelain panels, LHT installations & Thin-set applications
- Ultra-long open time up to 60 minutes
- Smooth/creamy for exceptionally easy troweling
- Robust non-sag, non-slump adhesion
- Extended coverage in a reduced weight 32 lb bag
- TotalFlex 150 exceeds ANSI A118.4HTE, A118.11 and A118.15HTE specifications
- TotalFlex 110 exceeds ANSI A118.4HTE and A118.11 specifications



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

150 Available in:	Item Number:
32 lb. bag	15030143 Gray Paper
32 lb. bag	15036372 White Paper
32 lb. bag	15030418 Gray Plastic*
32 lb. bag	15030416 White Plastic*

110 Available in:	Item Number:
32 lb. bag	15030142 Gray Paper
32 lb. bag	15036373 White Paper
32 lb. bag	15030417 Gray Plastic*
32 lb. bag	15030290 White Plastic*

\* Available out of Edison only

## Mortars & Additives

# Mortars & Additives

## Ultimate 6 Plus Mortar 487

A high-performance, polymer-modified, full coverage mortar with a unique combination of features that allow grouting in 6 hours while providing an extended open time. Ultimate 6 Plus significantly reduces the need for back buttering and has exceptional non-sag / non-slump characteristics for wall and floor applications.

- Ideal for gauged porcelain tile panels/slabs, LHT and thin set applications
- Approved for use under and over uncoupling membranes
- Approved for extruded foam waterproof boards
- Approved for indoor glass tile applications with intermittent water exposure (shower walls, backsplash)
- Extended open time and pot life
- Grout and return to service in 6 hours
- Extended coverage—50 pound coverage in a 40 pound bag
- Smooth, creamy consistency
- Exceeds ANSI A118.4TE and A118.11 specifications

Available in:	Item Number:
40 lb. bag	15036116 White Paper
40 lb. bag	15030010 White Plastic*

## Super Flex™ Ultra-Premium Thin Set Mortar 392 / 393

A polymer-modified mortar with a patented bonding formula that provides unparalleled bond strength over plywood, cementitious surfaces and other substrates.

- Best for bonding glass and porcelain tile
- Extended open time
- Exceeds ANSI A118.4E, A118.11 and A118.15E specifications
- Zero VOC

Available in:	Item Number:
50 lb. bag	15035028 Gray Paper
50 lb. bag	15030008 Gray Plastic*
9.75 lb. Pure Pak**	15035031 White
25 lb. bag	15035029 White Paper
50 lb. bag	15035030 White Paper
50 lb. bag	15030005 White Plastic*

\* Available out of Edison only

\*\* Registered Trademark of Excello Corporation



Conforms with LEED® v4 low emitting interiors. Compliant with (CDPH) Standard Method v1.2 VOC Emissions.



Conforms with LEED® v4 low emitting interiors. Compliant with (CDPH) Standard Method v1.2 VOC Emissions.

## 3N1™ Performance Mortar 384 / 385

A lightweight, polymer-modified mortar that combines medium bed and non-sag features into one product.

- Non-slump for heavy tile and stone floor applications
- Non-slip for large tile and stone weighing up to 6 pounds per square foot used in wall applications
- Extended open time
- Mold and mildew resistant
- Extended coverage—Similar coverage to a 50 pound bag
- Exceeds ANSI A118.4TE, A118.11 and A118.15TE specifications
- Zero VOC

Available in:	Item Number:
30 lb. bag	15035485 Gray Paper
30 lb. bag	15030021 Gray Plastic*
30 lb. bag	15035486 White Paper
30 lb. bag	15030020 White Plastic*



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Ultimate Large Tile Mortar 382 / 383

A polymer-modified mortar that is ideal for installing large format tile over plywood, cementitious surfaces and other substrates. It is ideal for use as a medium bed mortar for heavy and large format tile in both interior and exterior applications (maximum mortar thickness of 3/4" [19 mm] after the tile is embedded). It can also be used in standard thin-set applications.

- Recommended for heavy and large format tile
- Non-slump for heavy tile and stone floor applications
- Non-slip for large tile and stone wall application
- Can be used for thinset or medium bed applications
- Extended coverage—50 pound coverage in a 40 pound bag
- Exceeds ANSI A118.4TE and A118.11 specifications
- Zero VOC

Available in:	Item Number:
40 lb. bag	15035791 Gray Paper
40 lb. bag	15030016 Gray Plastic*
40 lb. bag	15035807 White Paper
40 lb. bag	15030017 White Plastic*



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

\* Available out of Edison only

# Mortars & Additives

## Full Flex® Premium Thin Set Mortar 390 / 391

A polymer-modified, general-purpose mortar designed to be used in a wide range of applications over plywood, cementitious surfaces and other substrates.

- General purpose mortar for thin-set installations
- Ideal for remodeling or commercial applications
- Better for bonding porcelain tile
- Exceeds ANSI A118.4 and A118.11 specifications
- Zero VOC

Available in:	Item Number:
25 lb. bag	15035022 Gray Paper
50 lb. bag	15035023 Gray Paper
50 lb. bag	15030004 Gray Plastic
9.75 lb. Pure Pak*	15035027 White
25 lb. bag	15035024 White Paper
50 lb. bag	15035025 White Paper
50 lb. bag	15030001 White Plastic



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Sturdi Flex™ Thin Set Mortar 345 / 346

Sturdi Flex Thin Set Mortar is a polymer-modified, general-purpose mortar that was created for use in basic installations over plywood, cementitious surfaces and other substrates.

- Steady, reliable bond
- Meets ANSI A118.4 and A118.11 specifications
- Zero VOC
- Contributes to LEED® project points

Available in:	Item Number:
50 lb. bag	15035012 Gray Paper
50 lb. bag	15030002 Gray Plastic
50 lb. bag	15035016 White Paper
50 lb. bag	15030003 White Plastic



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

\* Registered Trademark of Excello Corporation

## Full Contact Mortar 369

A polymer-modified mortar that can be used for bonding stone, granite, marble and tile 16" x 16" (40 x 40 cm) and larger to floors.

- Extended open time
- Superior transfer—full coverage with minimum effort
- Exceeds ANSI A118.4E and A118.11 specifications
- Zero VOC

**Available in:**      **Item Number:**  
**50 lb. bag**            **15035806 White**



Conforms with LEED® v4 low emitting interiors.  
 Compliant with (CDPH) Standard Method  
 v1.2 VOC Emissions.

## SturdiLight™ Lightweight Latex-Modified Thin Set Mortar 354 / 355

A lightweight, polymer-modified mortar that can be used for everyday applications over plywood, cementitious surfaces and other substrates.

- Extended open time
- Extended coverage—Similar coverage to a 50 pound bag
- Meets ANSI A118.4E and A118.11 specifications
- Zero VOC

**Available in:**      **Item Number:**  
**25 lb. bag**            **15035706 Gray**  
**25 lb. bag**            **15035731 White**



Conforms with LEED® v4 low emitting interiors.  
 Compliant with (CDPH) Standard Method  
 v1.2 VOC Emissions.

## Mortars & Additives

# Mortars & Additives

## PermaFlex® 300 LHT (Large Heavy Tile) 044 / 045

A one-component, polymer-modified, Portland cement-based mortar designed to set large format ceramic and stone tile firmly in place, without lippage or shrinkage.

- Helps overcome irregularities in tile thickness
- Can be used for bedding thickness 3/32"-1/2" (2.4 mm-12 mm)
- Compliant with ANSI A118.4 and ISO 13007 C2
- Zero VOC
- Contributes to LEED® project points

Available in:	Item Number:
50 lb. bag	15036030 Gray Paper
50 lb. bag	15030015 Gray Plastic*
50 lb. bag	15036032 White Paper
50 lb. bag	15030012 White Plastic*



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## PermaFlex® 300 Latex Modified Thin Set Mortar 034 / 035

A one-part, polymer-modified, thin set mortar that can be used for installing ceramic, porcelain and natural stone tiles over a variety of substrates.

- Great for basic residential or commercial installations
- Meets ANSI A118.4 and ISO 13007 C2
- Zero VOC
- Contributes to LEED® project points

Available in:	Item Number:
50 lb. Bag	15035784 Gray
50 lb. Bag	15035789 White Paper
50 lb. Bag	15030014 White Plastic*



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

\* Available out of Edison only



# Polymer-Modified Crack Isolation Mortar

## IsoLight™ Lightweight 1/8" Crack Isolation Mortar 359

This is a lightweight, polymer-modified mortar that protects tile from up to 1/8" (3mm) substrate cracking from in-plane horizontal substrate movement.

- Extended open time
- Non-sag/non-slump
- Recommended for use with glass tile
- Extended coverage—Similar coverage to a 50 pound bag
- Exceeds ANSI A118.4TE, A118.11 and A118.15TE specifications
- Zero VOC

**Available in:**      **Item Number:**  
**30 lb. bag**            **15035732 White**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

# Polymer-Modified Fast Set Mortars

## Fast Set 3N1™ Performance Mortar 517

A fast-setting, lightweight premium mortar that combines polymer-modified, medium bed and non-sag features into one mortar.

- Best for heavy and large format tile
- Ready for grouting in 3-4 hours
- Non-slump for heavy tile and stone floor applications
- Non-slip for large tile and stone wall applications
- Mold and mildew resistant
- Extended coverage—Similar coverage to a 50 pound bag
- Exceeds ANSI A118.4TF, A118.11 and A118.15TF specifications

**Available in:**      **Item Number:**  
**30 lb. bag**            **15035494 Gray\***



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

\* Available on a made to order basis only.

# Mortars & Additives

## Fast Set Ultimate Large Tile Mortar 386 / 387

A fast-setting, polymer-modified mortar that is ideal for use as a medium bed mortar for heavy and large format tile (maximum mortar thickness of 3/4" after tile is embedded) in both interior and exterior applications.

- Fast curing
- Non-sag/non-slump
- Thinset or medium bed application.
- Ideal for use with heavy and large format tiles
- Exceeds ANSI A118.4TF and A118.11 specifications
- Zero VOC

Available in:	Item Number:
40 lb. bag	15035872 Gray
40 lb. bag	15035871 White



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Quik Flex® Accelerated Thin Set Mortar 395 / 396

A polymer-modified, fast-setting, general-purpose mortar designed to be used in a wide range of applications, over plywood, cementitious surfaces and other substrates.

- Ready for grouting in 2.5-3 hours
- Exceeds ANSI A118.4 and A118.11 specifications
- Zero VOC

Available in:	Item Number:
25 lb. bag	15035032 Gray
25 lb. bag	15035034 White



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

# Dry Set Mortars

## Uncoupling Membrane Mortar 337 / 338

An unmodified, dry set, medium bed mortar that was created for use with uncoupling membrane and waterproofing membrane.

- Medium bed mortar for use with large format tile
- Excellent for wall application
- Mixed with water, meets ANSI A118.1 specifications
- Mixed with TEC® Acrylbond® AMA Acrylic Latex Mortar Additive, meets ANSI A118.4 and ANSI A118.11 specifications
- Zero VOC
- Contributes to LEED® project points

Available in:	Item Number:
50 lb. bag	15035873 Gray Paper
50 lb. bag	15030006 Gray Plastic
50 lb. bag	15035874 White Paper
50 lb. bag	15030007 White Plastic*



Conforms with LEED® v4 low emitting interiors. Compliant with (CDPH) Standard Method v1.2 VOC Emissions.

## Full Set Plus® Unmodified Thin Set Mortar 380 / 381 / 380-S

Full Set Plus® Premium Unmodified Mortar is a high strength, quick grab, unmodified formulation, ideal for wall installations of non-porous or semi-porous tile. It is also highly recommended for floors. This mortar can be used to install most tile over cementitious surfaces.

- Available in traditional and summer formulas\*
- Mixed with water, exceeds ANSI A118.1 specifications. Mixed with TEC® XtraFlex™ additive, exceeds ANSI A118.4 and A118.11 specifications. Mixed with TEC Acrylbond AMA additive, meets ANSI A118.4 and A118.11 specifications
- Zero VOC

Available in:	Item Number:
50 lb. bag	15035019 Gray Paper
50 lb. bag	15030013 Gray Plastic*
50 lb. bag	15035021 White Paper
50 lb. bag	15030011 White Plastic*
50 lb. bag	Gray Summer Formula**



Conforms with LEED® v4 low emitting interiors. Compliant with (CDPH) Standard Method v1.2 VOC Emissions.

\* Available out of Edison only

\*\* Summer formula available on the West Coast only.

# Mortars & Additives

## PermaSet® 200 Flooring Mortar

### 030 / 031

An unmodified, Portland cement-based, dry-set mortar that is designed for ceramic tile floor applications. It can be used in interior or exterior installations. Exterior applications require use with a TEC acrylic latex mortar additive.

- Ideal for ceramic tile floor installations
- Mixed with water, meets ANSI A118.1 and ISO 13007 C1
- Mixed with TEC XtraFlex additive, exceeds ANSI A118.4 and A118.11
- Mixed with TEC Acrylbond AMA additive, meets ANSI A118.4 and A118.11
- Zero VOC
- Contributes to LEED® project points

Available in:	Item Number:
50 lb. bag	15035782 Gray
50 lb. bag	15035783 White



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Specialty Mortars

### Ultimate Premixed Mortar

#### 130

A premium, ready-to-use mastic that is recommended for wall and floor applications with tile up to 20" x 20". The light gray, non-staining formula is ideal for light-colored stone and grout. The lightweight composition offers easy troweling, non-slip wall performance, and non-slump floor performance and may be used for glass tile up to 8" x 8".

- For tile and stone up to 20" x 20" on walls and floors
- Lightweight—non-slip performance on walls, non-slump on floors
- Fast drying
- Exceeds ANSI A136.1 Type I & II Specifications

Available in:	Item Number:
10.5 oz. cartridge	15036266 Gray
1 quart pail	15035497 Gray
1 gallon pail	15035496 Gray
3.5 gallon pail	15035495 Gray



# Mortar Additives

## Xtra Flex™ Acrylic Latex Additive 872

A premium, flexible, acrylic mortar additive that can be used in place of water when mixing TEC® brand unmodified thin set mortars.

- Best for porcelain tile
- Excellent for wet areas
- Exceeds ANSI A118.4 and A118.11 specifications
- Low VOC

<u>Available in:</u>	<u>Item Number:</u>
<b>5 gallon pail</b>	<b>15035220</b>
<b>50 gallon drum</b>	<b>15035219*</b>

\* Available on a made to order basis only.



## AcrylBond® AMA Additive 862

A flexible, acrylic mortar additive that can be used in place of water when mixing TEC brand unmodified thin set mortars to meet ANSI A118.4 and A118.11 specifications.

- Recommended for porcelain tile
- Low VOC

<u>Available in:</u>	<u>Item Number:</u>
<b>1.5 gallon bottle</b>	<b>15035217</b>
<b>5 gallon pail</b>	<b>15035216</b>



# Mastics



## LONG LASTING, STRONG BONDS FOR FLOORS AND WALLS

TEC® offers ready-to-use, floor and wall mastic adhesives designed to meet the needs of a wide variety of projects. They provide strong, resilient bonds on many substrates including well-cured concrete, cementitious backer units, coated glass mat backerboards, exterior grade plywood, existing ceramic tile, gypsum wallboard and water resistant gypsum wallboard, cured portland cement plaster, masonry, plastic laminate and more.

### Type 1 Mastic 101

An adhesive that can be used for installing ceramic, porcelain, natural stone, quarry and mosaic tile on interior floors and walls. Recommended for floor applications with tile up to 8" x 8" and wall applications with tile up to 12" x 12".

- Mold and mildew resistant
- Freeze/thaw stable
- Can be used on shower walls
- Meets ANSI A136.1 Type I and II specifications

Available in:	Item Number:
1 quart pail	15035556 White
1 gallon pail	15035550 White
3.5 gallon pail	15035544 White



800-832-9002    [tecspecialty.com](http://tecspecialty.com)

## Double Duty™ Plus Ceramic Tile Adhesive 123

A premium, ready-to-use white adhesive that was created for installing marble and ceramic tile over interior walls and floors.

- Recommended for floor applications with tile up to 8" x 8" (200 x 200 mm) and wall applications up to 20" x 20" (500 x 500 mm) with no slip
- Bright white, non-staining formula
- Exceeds ANSI A136.1 Type I and II specifications
- Low VOC
- Contributes to LEED® project points

<b>Available in:</b>	<b>Item Number:</b>
<b>1 gallon pail</b>	<b>15035249 White</b>
<b>3.5 gallon pail</b>	<b>15035248 White</b>



## Double Duty™ Ceramic Tile Adhesive 122

A ready-to-use adhesive that is perfect for installing ceramic tile over interior walls and ceilings.

- Recommended for floor applications with tile up to 8" x 8" (200 x 200 mm) and wall applications up to 13" x 13" (330 x 330mm)
- Quick grab, non-sag formula
- Exceeds ANSI A136.1 Type I and II specifications

<b>Available in:</b>	<b>Item Number:</b>
<b>1 gallon pail</b>	<b>15035004 White</b>
<b>3.5 gallon pail</b>	<b>15035003 White</b>



# Grouts & Sealants



## CREATE A LOOK THAT LASTS

When your project needs a high-performance grout, choose one of our advanced performance options. From crack, shrink and stain resistant grout to formulas that perform under diverse conditions, TEC® products offer advanced technology and performance.

- Advanced Performance Grout
- Premixed Grout
- Epoxy Mortar and Grout
- Epoxy Grout Cleaner
- Traditional & Cement Grout
- Grout Additive
- Caulks & Sealants



# Advanced Performance Grout

## Power Grout®

### 550

This advanced performance grout has a unique formulation that is stain proof\* and provides strong, color consistent joints free of efflorescence, that are resistant to shrinking and cracking.

Power Grout provides excellent performance in environments such as high traffic and wet conditions, and in residential and commercial applications.

- Stain proof\*
- Zero efflorescence
- Crack and shrink resistant
- Mold and mildew resistant
- Requires no sealing
- Fast setting—open to traffic in 4 hours
- 1/16" - 1/2" joint width
- Exceeds ANSI A118.7 specifications
- Zero VOC
- Contributes to LEED® project points

#### Available in:

**7 lb. bag**

**10 lb. bag**

**25 lb. bag**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

\*Power Grout is stain proof to most common water based stains when cleaned immediately. The prolonged exposure of any stain will increase the likelihood of permanent staining or discoloration of grout surface.



See page 54 for grout and caulk color options.

**Grouts & Sealants**

# Grouts & Sealants

## InColor™ Advanced Performance Tile Grout 575

A ready-to-use grout with a unique formulation that is easy to install, can be used for both interior and exterior tile installations, and is made for residential or commercial use. Easy to clean, mold and mildew resistant, color consistent, crack resistant, stain-proof\*, chemical resistant\*\* and requires no sealing. This universal formula can be used for floors and walls for grouting joints 1/16" to 1/2" (1.6-12 mm) and is backed by a limited lifetime warranty.


- Stain proof\*
- Zero efflorescence
- Crack and shrink resistant
- Mold and mildew resistant
- For use in intermittent wet areas (shower walls and bathtub surrounds)
- Requires no sealing
- 1/16" joint width
- Chemical resistant\*\*
- Low VOC
- Contributes to LEED® project points

**Available in:**  
**10 lb. pail**



\* InColor Grout is stain proof against most common stains, including blood and urine, when cleaned immediately.

\*\* See Product Data Sheet for list of resisted chemicals.

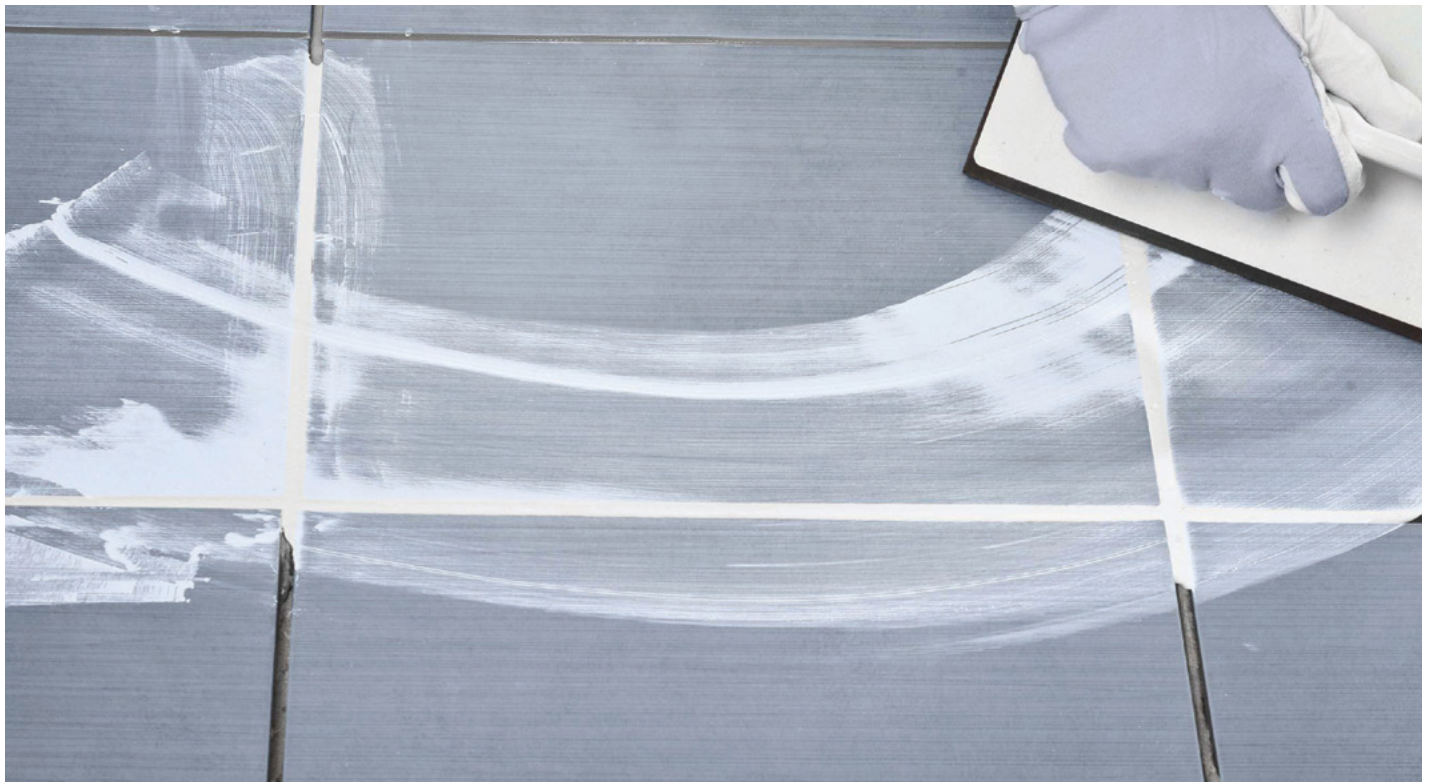

## AccuColor® Plus Grout 450

An advanced performance grout that delivers color consistent grout joints from 1/16" to 1/2" (1.6 - 12 mm) wide for both interior and exterior tile installations. Fast setting grout that provides stain and efflorescence resistance for residential and commercial grout applications.

- Stain resistant
- Efflorescence Resistant
- Crack and shrink resistant
- Mold and mildew resistant
- Requires no sealing
- Fast setting—open to traffic in 4 hours
- 1/16" - 1/2" joint width
- Meets ANSI A118.7 specifications

**Available in:**  
**25 lb. bag**

## Ready To Use Grout 647

Delivers durable, stain resistant grout joints. It was developed for residential use in intermittently wet as well as dry areas. It can also be used to grout over existing premixed or cementitious grout installations. Formulated with very fine particles of sand and may be used in grout joints as small as 1/16" (1.6 mm).

- Stain resistant
- Mold and mildew resistant
- Requires no sealing
- For use in intermittent wet areas
- 1/16" - 1/2" joint width

**Available in:**  
**1/2 gallon pail**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.



See page 54 for grout and caulk color options.

**Grouts & Sealants**

# Grouts & Sealants

## Design FX® Grout

546

Accentuates the natural beauty of glass, mosaic and metal tiles in addition to ceramic, porcelain and most natural stone tile. For use in tile joints from 1/16" to 1/2" (1.6-12 mm) on floors and 1/16" to 1/4" (1.6-6 mm) on walls. It is stain proof\*, approved for interior and exterior use and can be used for intermittent wet areas such as shower walls and bathtub surrounds. Rated up to moderate commercial use.

- Stain proof\*
- Zero efflorescence
- Crack and shrink resistant
- Mold and mildew resistant
- Requires no sealing
- 1/16" - 1/2" joint width
- Low VOC


### Available in:

1/2 gallon pail




\* Design FX grout is stain proof to most common household, residential stains when cleaned immediately. The prolonged exposure of any stain will increase the likelihood of permanent staining or discoloration of grout surface.

Color options shown below and on page 54.

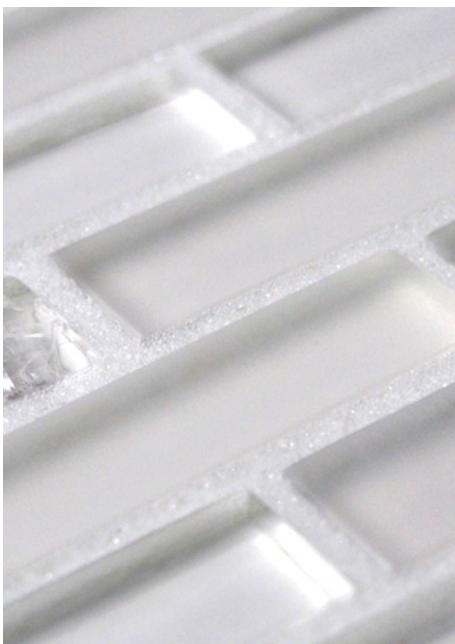

Crystal\*\*

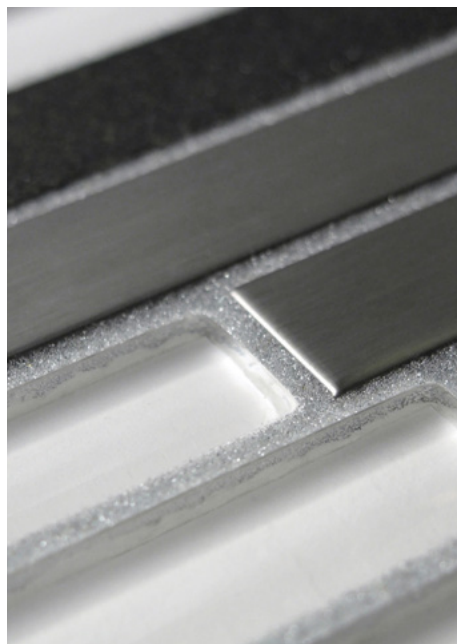

Silver



Bronze

# Premixed Grout

## Adhesive and Grout (Unsanded)

**631**

Formulated to set and grout ceramic tile on walls and floors. It is best for small tile jobs or repairs for ceramic tile up to 8" x 8".

- Mold and mildew resistant
- Requires no sealing
- 1/16" - 1/8" joint width

**Available in:**    **Item Number:**  
**1 quart pail**    **15035615 White**



## Adhesive and Grout (Sanded)

**691**

Formulated to set and grout ceramic tile on walls and floors. It is best for small tile jobs or repairs for ceramic tile up to 8" x 8".

- Mold and mildew resistant
- Requires no sealing
- 1/16" - 3/16" joint width

**Available in:**    **Item Number:**  
**1 quart pail**    **15035617 White**  
**1 gallon pail**    **15035619 White**



## Vinyl Tile Grout

**639**

TEC® Vinyl Tile Grout is a ready-to-use, premixed sanded acrylic grout that is highly stain resistant and for use with groutable vinyl tile. This color-consistent grout is also mold and mildew resistant.

- Highly stain resistant
- Mold and mildew resistant
- 1/8" - 1/4" joints

**Available in:**    **Item Number:**  
**1/2 gallon pail**    **15035973 Antique White**  
**1/2 gallon pail**    **15035974 Light Smoke**  
**1/2 gallon pail**    **15035925 Pearl**



## Grouts & Sealants

# Grouts & Sealants

## Epoxy Grout

### AccuColor EFX® Epoxy Grout and Mortar 440

Provides superior performance and unmatched design possibilities in one easy-to-use product. Dual purpose 100% solids epoxy grout and mortar is designed for tile and stone installations on floors, walls and countertops.

- Stain resistant
- Chemical resistant
- 1/16" - 1/2" joint width
- Exceeds ANSI A118.3 specifications in environments where high stain and chemical resistance is required

**Available in:**  
**3 gallon kit**



### Grout Colorant 505

Designed to change color, seal and refresh sanded and unsanded cement and epoxy grout joints.

**Available in:**  
**8 fl.oz. (237 mL) bottle**



## Epoxy Grout Cleaner

### AccuColor EFX® Clean-up Water Concentrate 442

Used for the clean-up phase of AccuColor EFX Epoxy Grout installation.

**Available in:**    **Item Number:**  
**1 gallon bottle**    **15035867**



# Traditional and Cement Grout

## AccuColor® Premium Unsanded Grout 620

A polymer-enhanced, Portland cement grout and is specifically formulated to provide highly wear-resistant and color consistent joints. Meets ANSI A118.6 specifications for commercial cement grout and ANSI A118.7 when used with TEC® Acrylic Grout Additive.

- Color consistency with absorptive tile
- Shrink resistant
- Good for high traffic and wet conditions
- 1/16" - 1/8" joint width
- Zero VOC

**Available in:**

**9.75 lb. bag**

**25 lb. bag**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## AccuColor® Premium Sanded Grout 650

A polymer-enhanced, Portland cement grout and is specifically formulated to provide highly wear-resistant and color consistent joints. Meets ANSI A118.6 specifications for commercial cement grout and ANSI A118.7 when used with TEC Acrylic Grout Additive.

- Color consistency in extra heavy commercial applications
- Good for high traffic and wet conditions
- 1/8" - 1/2" joint width
- Zero VOC

**Available in:**

**9.75 lb. bag**

**25 lb. bag**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

See page 54 for grout and caulk color options.

**Grouts & Sealants**

# Grouts & Sealants

## Grout Additive

### Acrylic Grout Additive 869

An acrylic latex admixture formulated for use in place of water when grouting ceramic tile. This additive is specifically formulated for use with AccuColor Portland cement grouts. Makes joints less susceptible to water penetration (especially important when grouting wet areas). It also increases grout flexibility.

- Recommended for any exterior grout application subjected to freeze/thaw conditions
- Low VOC

**Available in:**    **Item Number:**  
**64 oz. bottle**    **15035258**  
**1 gallon bottle** **15035256**



### Grout Boost®

An additive that can be mixed with cement-based grout in place of water, when grout is installed, to provide resistance to water and oil-based grout stains.

- Stain-proof\*
- Mixes in place of water with any standard Portland cement grout
- Grout never needs sealing
- Does not affect grout color\*\*

**Available in:**    **Item Number:**  
**27 oz. bottle**    **15035999**  
**70 oz. bottle**    **15036001**



\* Grout Boost is stain proof to most common household, residential stains when cleaned immediately.

\*\* Grout Boost is mixed with a Portland cement based grout. All Portland cement based products, including grout, have the potential for efflorescence and color shading, which is not considered a manufacturing defect. Grout Boost doesn't cause efflorescence.



# Caulks and Sealants

## AccuColor 100® 100% Silicone Sealant 155

AccuColor 100 100% Silicone Sealant is designed to provide a flexible, long lasting, and water-resistant seal. Use for swimming pools, spas, fountains and other wet area applications.

- Water resistant
- Meets ASTM C920 Type S, NS, Class 25
- Low VOC
- Contributes to LEED® project points

**Available in:**

**10.5 oz. cartridge**



## AccuColor® Siliconized Unsanded Acrylic Caulk 820

A smooth, unsanded caulk that is formulated to precisely color-match TEC® AccuColor grouts for flawless matching. Forms a tough, flexible, water and weather-resistant seal on most building materials, protecting your installation from moisture, drafts and rot. Contains a special silicone additive to promote greater adhesion and longer life.

- Mold & mildew resistant
- Water resistant
- Paintable with latex paint
- Low VOC
- Contributes to LEED® project points

**Available in:**

**10.5 oz. cartridge**



## AccuColor® Siliconized Sanded Acrylic Caulk 850

A sanded formula that precisely color-matches TEC AccuColor grouts. It forms a tough, flexible, water and weather-resistant seal on most building materials, protecting your installation from moisture, drafts and rot. Contains a special silicone additive to promote greater adhesion and longer life.

- Mold & mildew resistant
- Water resistant
- Paintable with latex paint
- Low VOC
- Contributes to LEED® project points

**Available in:**

**10.5 oz. cartridge**



See page 54 for grout and caulk color options.

**Grouts & Sealants**

# Microbial Cleaners



## FASTER. CLEANER. SMARTER.

TEC's powerful Microbial Cleaners quickly break down surface contaminants for easy removal, without harsh chemicals. Formulated with TEC Microblast Technology™ these ready-to-use cleaning products leave the floor or carpet pristine clean, residue-free, and more resistant to re-soiling.

### Microbial Asphalt Walk-Off Cleaner (MAWC)

A powerful, easy-to-use spot cleaner to remove asphalt walk-off contaminants from all carpeting. Ideally, it is used as a spot cleaner before carpet cleaning to thoroughly remove asphalt residue from these traffic areas. MAWC provides superior resistance to re-soiling so your carpets stay clean longer.

- Ready-to-use water-based formula
- Does not leave dirt-attracting residuals for superior resistance to re-soiling
- Solvent-free & no harmful fumes
- Fast-acting microbial technology

**Available in:**                      **Item Number:**  
**32 Oz. Spray Bottle**    **10015755**



## Microbial Carpet Cleaner (MCC)

A CRI-approved cleaner that effectively removes residual dirt, grease, and grime from all carpeting. The fast-acting microbial formula breaks down contaminants which can then be extracted with water. Unlike traditional surfactant-rich carpet cleaners which leave behind soil-attracting residues, MCC provides superior resistance to carpet re-soiling so carpet stays clean longer.

- Leaves no residue and reduces re-soiling
- Deep cleaning, water-based formula
- Deodorizing

**Available in:**      **Item Number:**

**2 gallon pail**      **10015575**

**4 gallon pail**      **10015554**



## Microbial Daily Floor Cleaner (MDFC)

A ready-to-use daily cleaner specially formulated to remove dirt and grime from the surface of resilient flooring. This includes vinyl, rubber, urethane and epoxy coated flooring. It restores the original flooring's surface integrity without leaving behind any residuals. MDFC is extremely effective in controlling odors from bodily fluids on sports flooring as well as exercise mats.

- Restores original surface with no residuals
- Cleans dirt, stains, and odors in one application
- Great for resilient and rubber floors

**Available in:**      **Item Number:**

**2 gallon pail**      **10015583**

**4 gallon pail**      **10015544**



## Microbial Rubber Floor Deep Cleaner (MRDC)

An advanced, non-hazardous, ready-to-use cleaner specially formulated to remove wax and residual detergents, from previous cleaners, as well as removing dirt and grime. It restores the original flooring's surface integrity. MRDC is extremely effective at reducing surface slipperiness for rubber sports floors.

- Restores original surface with no residuals
- Cleans dirt, stains, and odors in one application
- Great for resilient and rubber floors

**Available in:**      **Item Number:**

**2 gallon pail**      **10015583**

**4 gallon pail**      **10015544**



# Microbial Cleaners

## Microbial Sports Floor Cleaner (MSFC)

A non-hazardous, ready-to-use cleaner formulated to remove dirt and grime from resilient flooring. This includes vinyl, rubber, urethane and epoxy coated flooring. It removes soap residue from previous cleaners while restoring the original flooring's surface integrity without leaving behind residuals. MSFC is highly effective at controlling odors from bodily fluids on sports flooring and exercise mats.

- Restores original surface with no residuals
- Effectively cleans and deodorizes in one application
- No harmful fumes

**Available in:**      **Item Number:**

**2 gallon pail**      **10015567**

**4 gallon pail**      **10015556**



## Microbial Spot Cleaner (MSC)

An effective solution that quickly removes residual dirt, grease, and grime from carpeting and fabrics. The fast-acting microbial formula removes stains by breaking down contaminants. Unlike traditional surfactant-rich spot cleaners which leave behind soil-attracting residues, MSC provides superior resistance to re-soiling so carpeting and fabrics stay clean longer.

- Ready-to-use water-based formula
- Does not leave dirt-attracting residuals for superior resistance to re-soiling
- Fast-acting microbial technology

**Available in:**      **Item Number:**

**32 Oz. Spray Bottle**      **10015766**



# Preformed Components


As part of the TEC® system, TEC preformed shower components are consistent and easy to install. When used along with TEC tile installation products, these preformed components allow you to add a design element that fits with today's building trends.

- Ideal for showers, kitchen nooks, pools or wet areas
- Consistent, preformed design saves time; perfect for multi-unit construction, resorts, spas and pool facilities, new home construction and remodeling projects
- Easy to install; design allows for tiling with same tile as the surrounding walls
- Coated with an IAPMO-approved, waterproof membrane that meets ANSI A118.10
- TEC System Limited Warranty available

## Niches


- In-wall design allows niches to be tiled like the surrounding walls
- High density foam construction eliminates water absorption
- Coated with an IAPMO-approved, waterproof membrane that meets ANSI A118.10

\*Note: All nominal dimensions are of the interior cavity. All niches are designed for 16" o.c. walls.

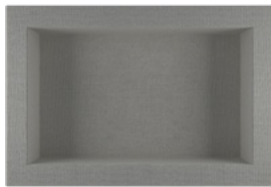


**Niche, PF-306  
Rectangular**

20" H x 12" W  
Item #75000370

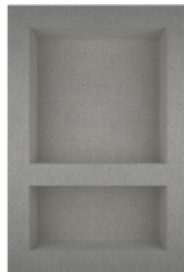

**Niche, PF-304  
Wide Combo**

12" H x 12" W or 6" H x 12" W  
Item #75000369




**Niche, PF-301  
Square**

12" H x 12" W  
Item #75000366

## Slopes

- Complies with the tile industry standard for 1/4" slopes, and with the Tile Council of North America (TCNA) Handbook guidelines noted for slopes in shower receptors, with ASTM C920 for mildew resistance, and with ANSI A108.13
- Manufactured to allow for the industry "pre-slope" required under all shower pans
- Part of a reliable system to install the pan liner, mortar bed and tile in one day
- Essential for proper mortar bed drainage which helps reduce mold growth

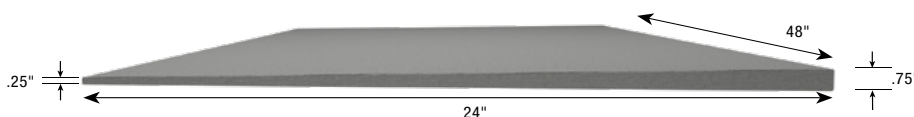

### Slopes, PF-102

24" x 48" | Tapered to 3/4" to 1/4"

Standard Dimension  
Item #75000367

Note: It is the user's responsibility to ensure waterproofness prior to tiling.

# TEC® Grout & Caulk Color Palette

	<b>912 Optic White*</b> PG ACP AC 100		<b>915 Light Smoke</b> PG ACP AC 100 EFX <sup>†</sup> IC		<b>994 Dark Walnut</b> PG AC 100 EFX <sup>†</sup>
	<b>910 Bright White</b> PG ACP AC 100 EFX <sup>†</sup> IC RTU		<b>932 Mocha</b> PG ACP AC 100 EFX <sup>†</sup>		<b>958 Espresso</b> PG AC 100 EFX <sup>†</sup>
	<b>931 Standard White</b> PG ACP AC 100 EFX <sup>†</sup> IC		<b>973 Warm Taupe</b> PG AC 100 EFX <sup>†</sup>		<b>966 Urban Bronze</b> PG ACP AC 100 EFX <sup>†</sup> IC
	<b>928 Praline</b> PG AC 100 EFX <sup>†</sup> IC		<b>939 Mist</b> PG ACP AC 100 EFX <sup>†</sup> IC		<b>929 Charcoal Gray</b> PG ACP AC 100 EFX <sup>†</sup> IC RTU
	<b>905 Light Cool Gray</b> PG ACP AC 100 EFX <sup>†</sup> IC		<b>934 Slate Gray</b> PG ACP AC 100 EFX <sup>†</sup> IC RTU		<b>941 Raven</b> PG ACP AC 100 EFX <sup>†</sup> IC
	<b>909 Sterling</b> PG ACP AC 100 EFX <sup>†</sup> IC		<b>937 Steel Gray</b> PG ACP AC 100 EFX <sup>†</sup> IC		<b>950 Jet Black</b> PG ACP AC 100 EFX <sup>†</sup> IC
	<b>949 Silverado</b> PG ACP AC 100 EFX <sup>†</sup> IC RTU		<b>933 Standard Gray</b> PG AC 100 EFX <sup>†</sup> IC		<b>953 Starry Night</b> PG ACP AC 100 EFX <sup>†</sup> IC
	<b>908 Dove Gray</b> PG ACP AC 100 EFX <sup>†</sup> IC		<b>927 Light Pewter</b> PG ACP AC 100 EFX <sup>†</sup> IC		<b>DFX Bronze</b> DFX
	<b>903 Birch</b> PG ACP AC 100 EFX <sup>†</sup> IC		<b>947 Light Bronze</b> PG ACP AC 100 EFX <sup>†</sup> IC		<b>DFX Crystal</b> DFX
	<b>988 Pearl</b> PG ACP AC 100 EFX <sup>†</sup> IC RTU		<b>935 Silhouette</b> PG ACP AC 100 EFX <sup>†</sup>		<b>DFX Silver</b> DFX
	<b>940 Antique White</b> PG ACP AC 100 EFX <sup>†</sup>		<b>925 Sable</b> PG AC 100 EFX <sup>†</sup>		<b>133 Clear</b> 100
	<b>961 Sandstone Beige</b> PG AC 100 EFX <sup>†</sup> IC RTU		<b>982 Summer Wheat</b> PG ACP AC 100 EFX <sup>†</sup> IC		
	<b>945 Light Buff</b> PG ACP AC 100 EFX <sup>†</sup> RTU		<b>969 Coffee</b> PG AC 100 EFX <sup>†</sup> RTU		

## GROUT & CAULK COLOR GUIDE

<b>PG</b>	Power Grout® Ultimate Performance Grout (10 lb./25 lb. bags)	<b>EFX</b>	AccuColor EFX® Epoxy Grout and Mortar
<b>ACP</b>	AccuColor® Plus Grout	<b>IC</b>	InColor™ Advanced Performance Grout
<b>AC</b>	AccuColor® Premium Grout, Sanded and Unsanded	<b>RTU</b>	Ready To Use Grout
<b>100</b>	AccuColor® Siliconized Acrylic Latex Caulk, Sanded and Unsanded and AccuColor 100® 100% Silicone Sealant	<b>DFX</b>	Design FX® Grout


Colors shown are printed reproductions and may vary from actual product. Please request a grout chart or meet with your TEC® representative for more matching options.

\*AccuColor Unsanded Only

†Available on a made to order basis only, minimum order quantity applies.

Grout & Caulk Colors

**Scan here for access to  
our Coverage Calculator.**

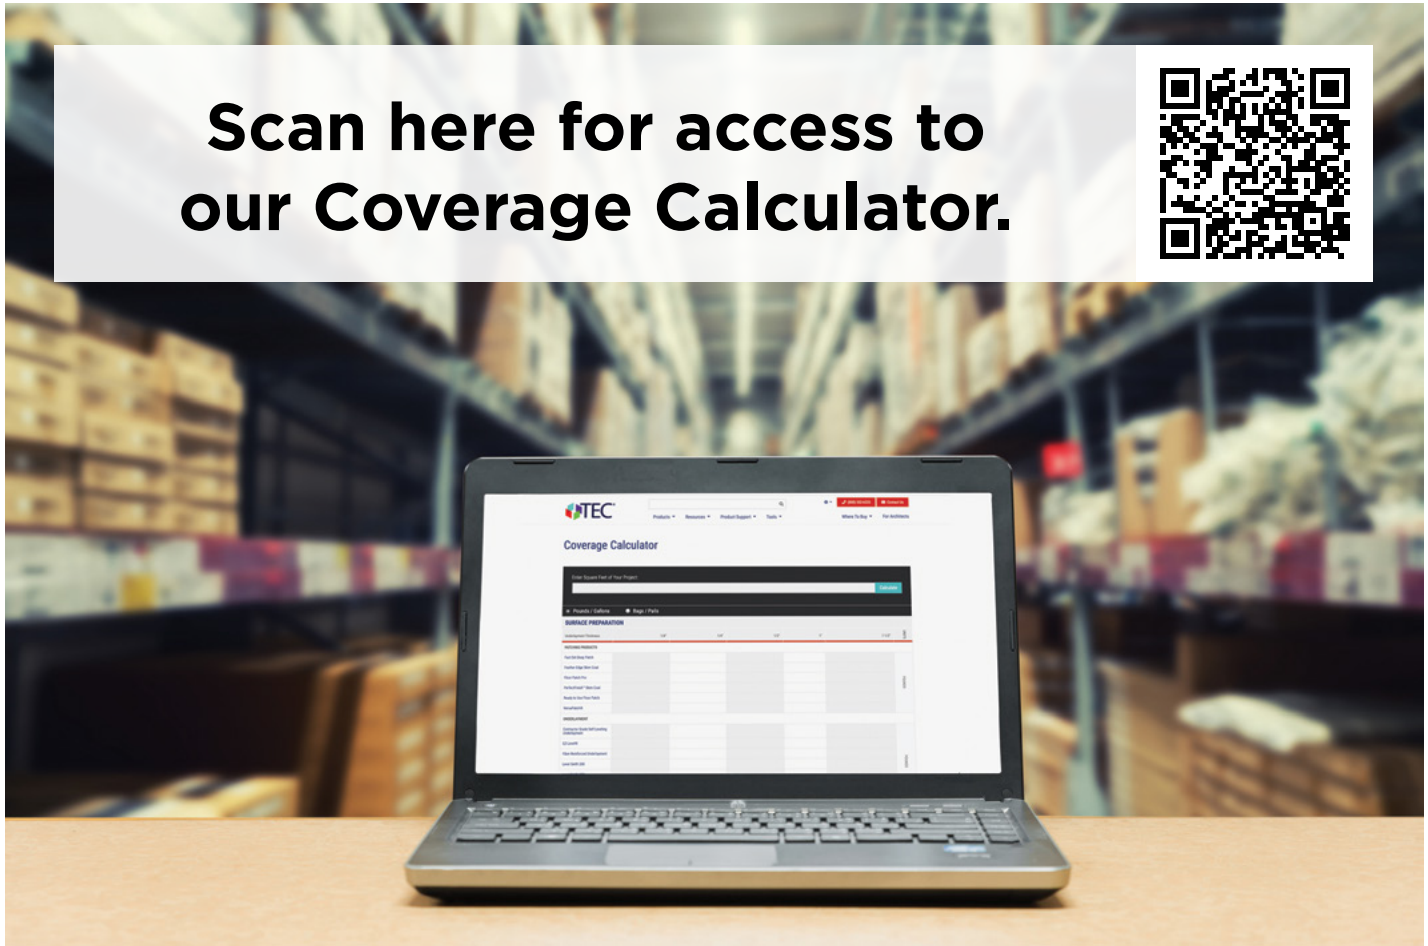

The TEC brand is part of H.B. Fuller, a leading global adhesives provider. With revenues of nearly \$3.5 billion, H.B. Fuller's commitment to innovation brings together people, products and processes that answer and solve some of the world's biggest challenges - connecting what matters™.

**For more information, visit [TecSpecialty.com](http://TecSpecialty.com).**

LiquiDam EZ™, LiquiDam™, PerfectFinish™, VersaPatch®, Level Set® 500 HF, Level Set® 400 HF, Level Set® Wear Topping, Level Set® 300, EZ Level®, Level Set® 200, Level Set® LW-60, Level Set® Deep Pour 3, Level Set® Epoxy Primer, HydraFlex™, Triple Flex™, Flexera®, The Perfect Putdown®, Wood Assure™, Wood Endure™, Wood Go™, Wood Ready™, Wood Secure™, IsoLight™, Fast Set 3N1®, Quik Flex®, TotalFlex®, Super Flex™, 3N1®, Full Flex®, Sturdi Flex™, SturdiLight™, PermaFlex® 300 LHT, PermaFlex® 300, Full Set Plus®, PermaSet® 200, Xtra Flex™, AcrylBond®, Double Duty™, Double Duty™ Plus, Power Grout®, InColor™, AccuColor® Plus, Design FX®, AccuColor EFX®, AccuColor®, Grout Boost®, AccuColor 100® and Microblast Technology™ are trademarks of H.B. Fuller Construction Products Inc.



H.B. Fuller Construction Products Inc.  
1105 South Frontenac Street  
Aurora, IL 60504-6451  
800-832-9002  
[hbfuller.com/construction](http://hbfuller.com/construction)

[tecspecialty.com](http://tecspecialty.com)  
TEC® and the TEC® logo are trademarks of  
H.B. Fuller Construction Products Inc.  
LEED® is a registered trademark  
of U.S. Green Building Council

Form #: FL\_R0924-20  
©2024 H.B. Fuller Construction Products Inc.